
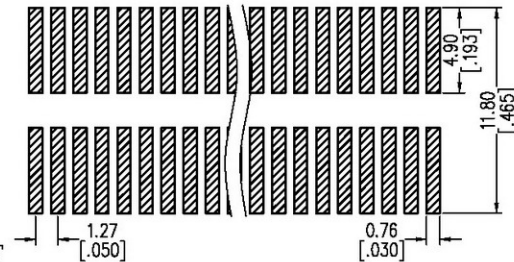


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)



Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃ to +105℃

Contact Material: Brass
Contact plating: Au or Sn Over Ni
Insulator Material: PA9T+30%CF(UL94V-0)

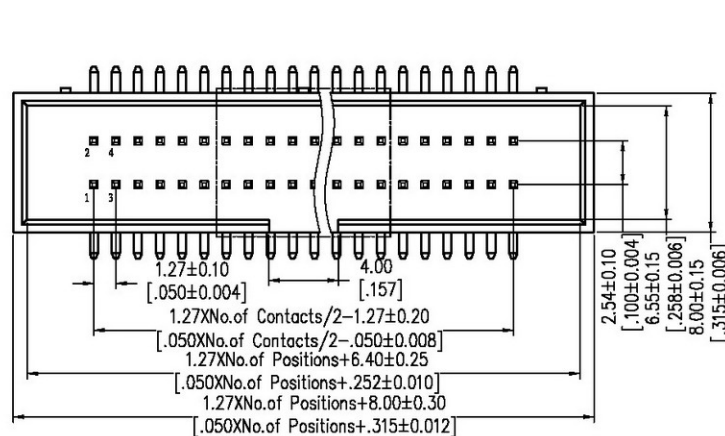

Ordering Information
3140-XX M XX BK00 X1

No. of Pins	Contact Plating	Color Insulator	Packing
10 34	G0=Gold Flash	B=Black	T=Tube
14 40	G3=10u"Gold	W=White	P=Tube+CAP
16 44	G4=1.5u"Gold		R=Tube&Recel+CAP
20 50	G5=30u"Gold		
24 60	S0=Gold Flash/Tin		
26 64	S3=10u"Gold/Tin		
30 80	S4=15u"Gold/Tin		
100	S5=30u"Gold/Tin		
	SN=Tin		

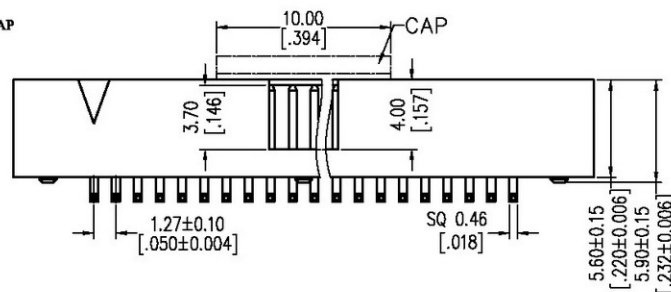

Item	Pitch	Mating
Standard	1.27X2.54	5242
Alternate		