

HSF

NOTES:

Current Rating: 3.0AMP

Contact Resistance: 25mΩ Max

Withstand Voltage: 500V AC/Minute

Insulation Resistance: 1000MΩ Min

Operation Temperature: -55℃ to +105℃

Contact Material: Brass

Contact plating: Au Or Sn over Ni

Insulator Material: PA66+30%G.F UL94V-0

Shell: Cold Roller Steel, Ni Plated

Revit/Harpoon: Brass, Sn Over Ni Plated

Ordering Information


6215B-15 F M N S1 B 0 1

No. of Pins
15P

Product Type
M=With Revit
Without Screw

Contact Plating
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

Insulator Color
B:Black
U:Blue

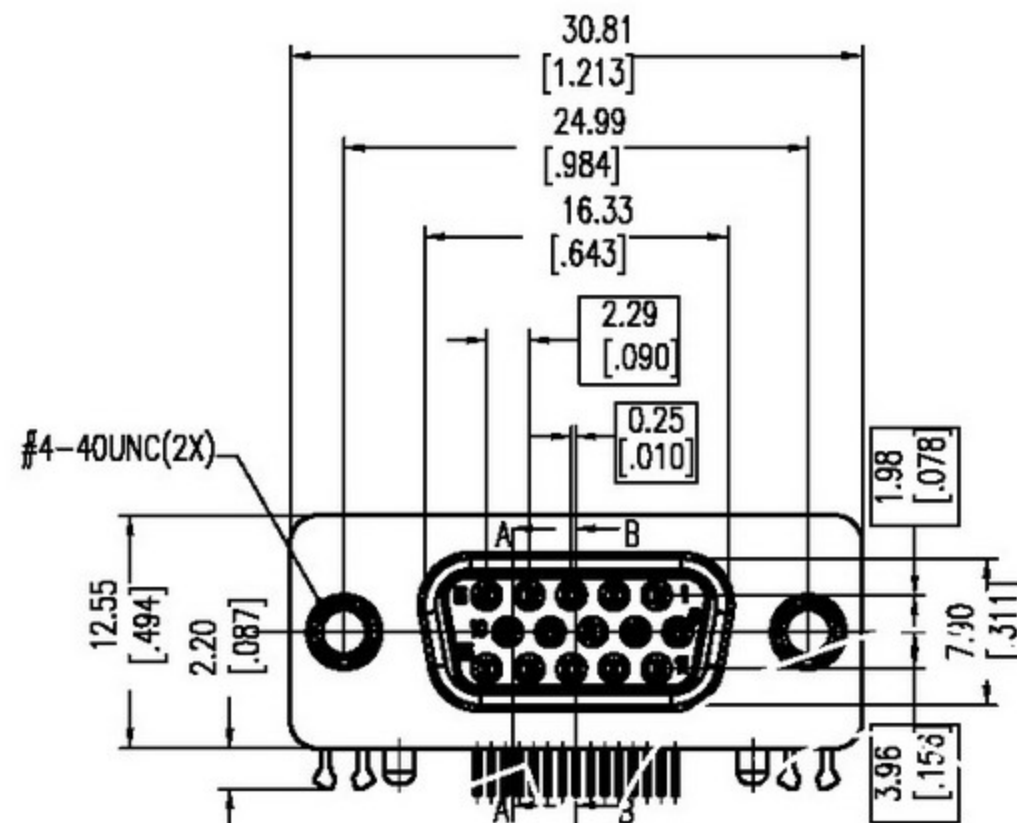

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

