HSF

NOTES:
Rated Current: 3.0AMP
Contact Resistance: 20mΩ max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min
Operation Temperature: −40℃ to +105℃

Contact Material: Phosphor Bronze
Contact Plating: Au Or Sn Over Ni
Insulator Material: LCP+30%G.F UL94V-0

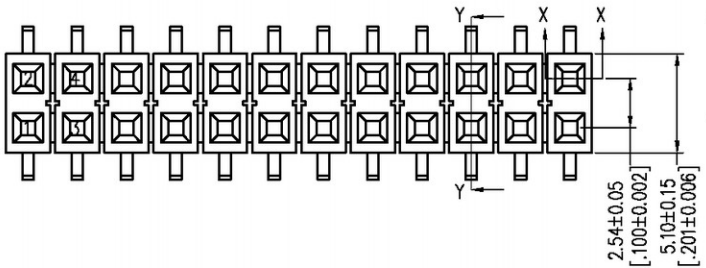

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

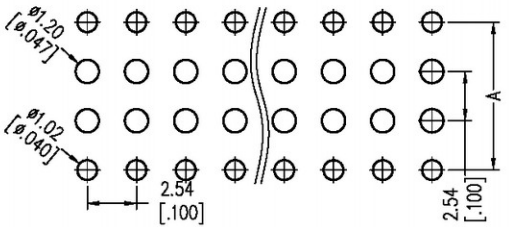

Ordering Information

2185E-2 XX W XX DUN X X

- No.of Pins per ROW:02-40PIN
- Contact Plating: G0=Gold Flash; G3=10μ"Gold; G4=15μ"Gold; G5=30μ"Gold; S0=Gold Flash/Tin; S3=10μ"Gold/Tin; S4=15μ"Gold/Tin; S5=30μ"Gold/Tin; SN=Tin
- Packing: T=Tube
- Series No.

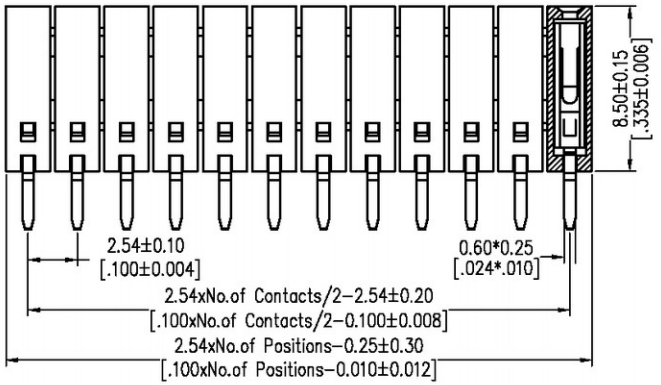

Section X-X



Section Y-Y

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

TITLE(DIM: A)	PART NO.
7.62	2185E−2XXWXXDUNT1
6.50	2185E−2XXWXXDUNT2
5.70	2185E−2XXWXXDUNT3