HSF

NOTES:
Current Rating:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze
Contact plating:Au over Ni
Insulator Material:PA9T+30%GF UL94V-0

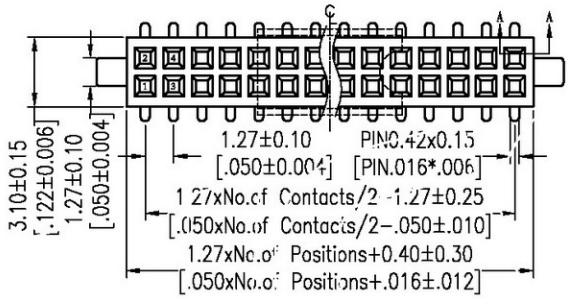

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

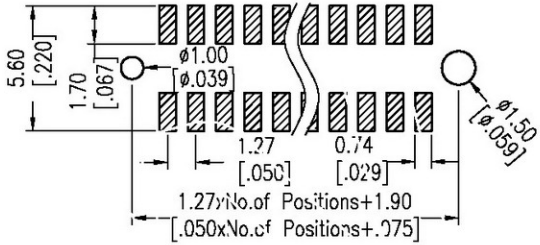



Special CAP for 2*2P,2*3P,2*4P

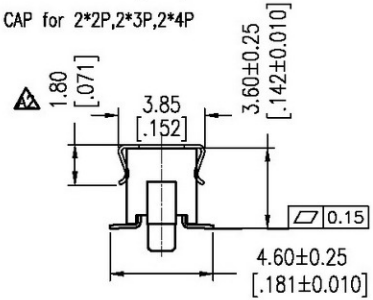

Ordering Information

2334-2 XX M XX CUN T 3

- XX: No.of Pins per Row: 02~50Pin
- XX: Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
- T: Packing: T=Tube, P=Tube+CAP, R=Tape&Reel+CAP

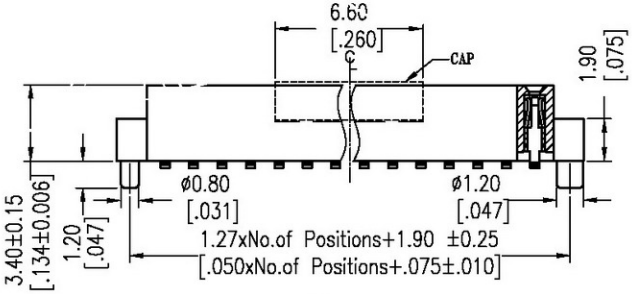

SECTION A-A

Item	Pitch	Mating
Standard	1.27	1310/1315/1320/3131
Alternate		