HSF

NOTES:
Rated Current:7.0AMP
Contact Resistance:30mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze
Contact Plating:Sn Over Ni
Insulator Material:LCP+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

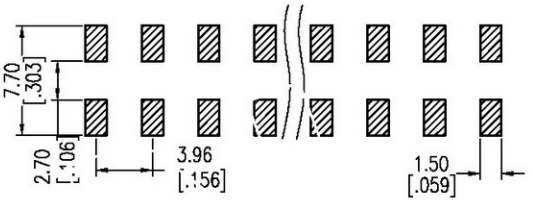

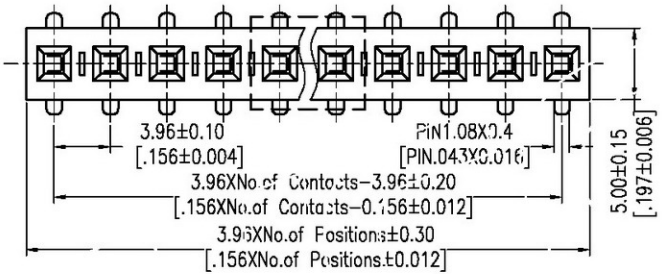

Ordering Information

2889-1 XX M XX D UN T 1

- XX: No.of Pins per Row: 02~30Pin
- XX: Contact Plating: SN=Tin, SM=Matte Tin
- T: Packing: T=Tube, P=Tube+CAP, R=Tube&Reel+CAP

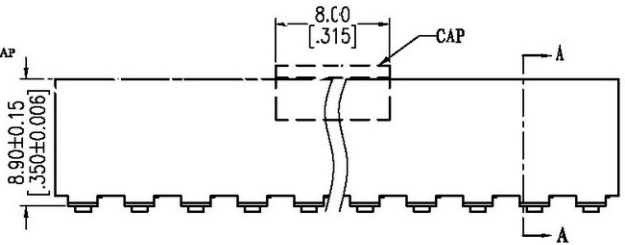



SECTION "A-A"

Item	Pitch	Mating
Standard	3.96	1832
Alternate		