

HSF

NOTES:

Rated Current:3.0AMP.

Contact Resistance:20mΩ Max.

Withstand Voltage:1000V AC/DC



Insulation Resistance:1000MΩ Min.

Operation Temperature:-40℃ to +105℃




Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:PA9T+30%G.F UL94V-0 BK

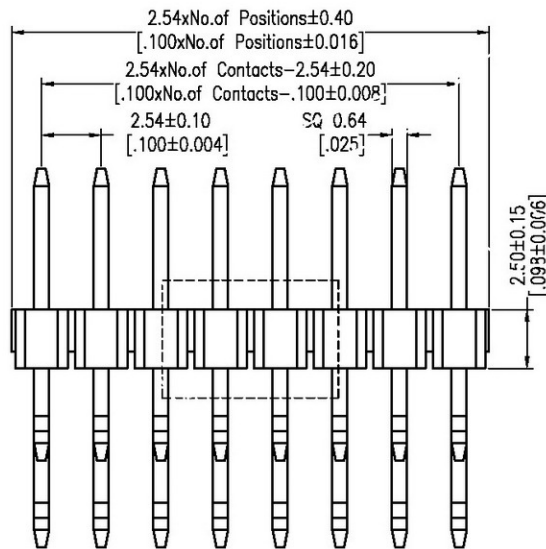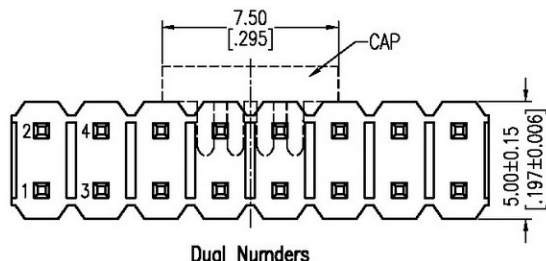

Recommended P.C.B Layout (Top Side) (PCB BOARD TOLERANCE±0.05)

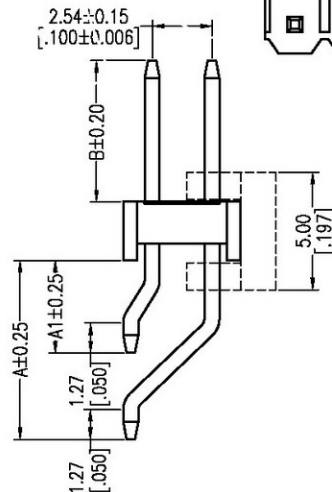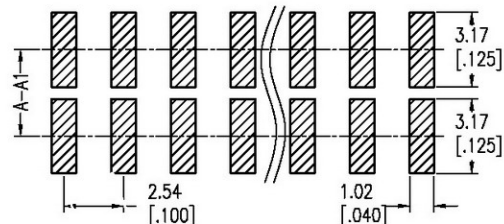

Ordering Information

1125-12 XX XX Z XXX X 1

No. of Pins	Contact Plating	Pin Length(Short)	Packing
Per Row:02~40	G0=Gold Flash	L=A1+B+2.8	T=Tube
	G3=10u"Gold	Standard:128=12.8	P=Tube+CAP
	G4=15u"Gold		R=Tape&Reel+CAP
	G5=30u"Gold		
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		

Item	Pin Length	A1	A	B	Mating
Standard	12.80	3.94	7.62	6.00	2171 2185
Alternate					