

HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

NOTES:

Rated Current:1.0AMP.

Contact Resistance:20m Ω Max.

Withstand Voltage:500V AC/DC





Insulation Resistance:1000M Ω Min.

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:PA9T+30%G.F UL94V-0 BK

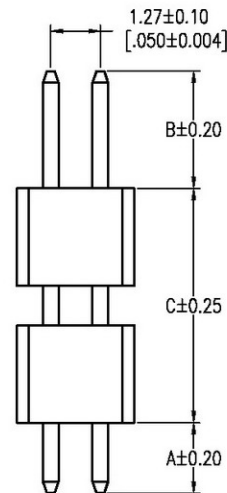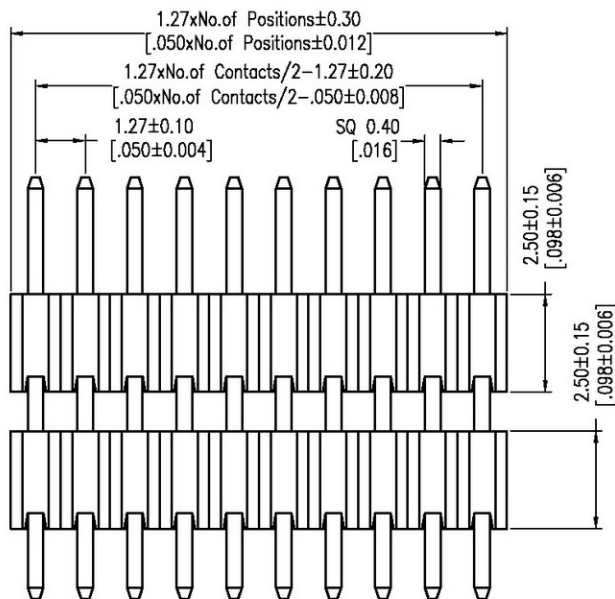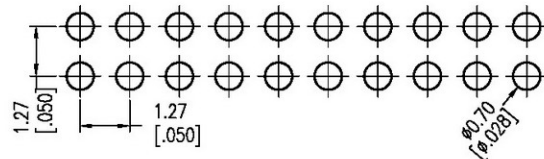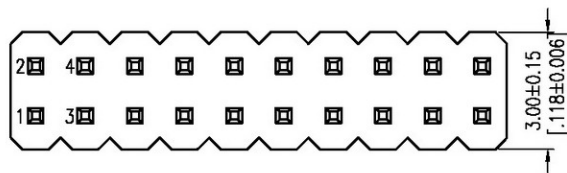

Ordering Information

1325-22 XX XX S XXX X 1

No.of Pins Per Row:02-50	Contact Plating	Pin Length	Packing
	G0=Gold Flash	L=A+B+C	A=Tray
	G3=10u"Gold	Standard:	T=Tube
	G4=15u"Gold		
	G5=30u"Gold		
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		

Item	Pin Length	A	B	C	Mating
Standard	---	1.80	1.90	---	2321
	---	1.80	3.00	---	2334
	---	1.80	4.00	---	2344
Alternate					